

SOFT-LEATHER/LEATHER

PELLE/CUOIO

Soft - leather

Featuring softness and elasticity, all the leather chosen by Lapalma is of European origin, chrome-tanned, pigmented, corrected top-grain and aniline top-grain. It has excellent colourfastness and complies with the main fire-resistance tests such as CigaretteTest EN1021.

Leather

The hide upholstery of our furniture has an impressive thickness of 2 - 2.5mm. This natural pigmented material is resistant to rubbing and has excellent lightfastness.



eco pelle / eco-leather / Kunstleder / simil cuir / ecopiel

Cat A - Grimm Fr MP

Application

Contract and domestic use

Description

Composition

31% CO - 68% PVC- 1% PU

Weight g/m2 640

Width cm 140

Tests

Abrasion

resistance cicli / cycles EN ISO 5470-2
150000

Colour fastness to light (Xenotest)

UNI EN ISO 105-B02 7 colour change

Dry rubbing

ISO 105 X-12 4/5

Wet rubbing

ISO 105 X-12 4/5

Acid perspiration

ISO 105 E-04 4/5

Alcaline perspiration

ISO 105 E-04 4/5

Bending strenght cycles

UNI 4818-13 150000

Tensile strenght

ISO1421, Met.1 550 N warp, 300N weft

Tear strenght

ISO 4674-1 40 N warp, 45N weft

Flame resistance

EN 1021-1 EN 1021-2

NF D 60-013

UNI 9175 CL. 1IM

BS 5852 crib 5

Care

Clean with a damp cloth
and mild soap.

Samples are purely indicative because of natural inconsistencies that occur in the raw materials. As a result there may be small differences in the product delivered.



eco pelle / eco-leather / Kunstleder / simil cuir / ecopiel

Cat B - Valencia C5 SPRADLING

Application

Contract and domestic use.

Description

Composition:
front PVC

back polyester cotton

Width: 137 cm

Weight: app. 890 g/lin.m

Tests

Abrasion
App. 300.000 Martindale rubs
EN ISO 12947 part 2

UV Xenotest DIN54004 blue wool scale

Antibacterial Protection

Flame resistance
EN 1021-part 1/2
BS 5852, part 2
BS 5852 crib 5
FMVSS 302
FAR 25/853

Care

Dry clean or clean with foam
detergents.

Samples are purely indicative because of natural inconsistencies that occur in the raw materials. As a result there may be small differences in the product delivered.



Cat B - Valencia C5 SPRADLING

							
7001 Amethyst	3068 Marine	2108 Night	3067 Delft	3001 Lavendel	3069 Baltic	5057 Türkis	2106 Coral
							
5056 Jade	2119 Teal	4043 Platin	5065 Petrol	4042 Titan	2107 Skylight	4040 Auster	4045 Perle
							
4044 Warm Grey	2116 Camel	2117 Cashmere	0035 Terracotta	2115 Chestnut	0033 Buche	9035 Schwarz	4003 Graphite
							
2109 Citrus	2110 Avocado	5041 Apfel	5001 Olive	5069 Grün	4052 Lichtgrau	4002 Laurel	4020 Silver
							
6020 Gold	1020 Ivory	8020 Pearlescence					

pelle / soft -leather / Softleder / peau / piel

Application

Contract and domestic use.

Description

Thickness 0,9/1,0 mm

European raw hides

Chrome tannage

Through-dyeing Aniline

Finishing pigmented

Samples are purely indicative because of natural inconsistencies that occur in the raw materials. As a result there may be small differences in the product delivered.

Tests

This item complies with the 3M test for oleo and hydro repellency. The Scotchgard treatment gives more protection and durability to leather.

Dry rub fastness
UNI EN ISO 11640 > 3 Grey Scale

Light fastness
UNI EN ISO 105-B02 > 3 Blue Scale

Tear resistance
UNI EN ISO 3377-1 > 20 N


Flame resistance
BS EN 1021-2:2006
No Ignition
BS EN 1021-1:2006
No Ignition



EPD®

Care


Dust with a soft and dry cloth for the normal cleaning. Stains can be treated with a wet cloth or cotton wool and with products for the cleaning initially more delicate like neutral soap or cleansing milk. Dry immediately after treatment. Never use abrasive or aggressive products like solvents, stain removers. Never steam it. Don't use shoe cleaning products. When a new product is used for cleaning, apply it in a "hidden" area to test its effectiveness and to avoid damages where more visible. Avoid placing leather near direct sun. Keep the leather away from heat sources. Dust regularly with a soft and dry cloth.




P3
Fango chiaro



P10
Grigio



P7
Fango scuro



P4
Bianco



P9
Marrone scuro



P1
Nero



P2
Rosso

cuoio / leather / Leder / cuir / cuero

Application

Contract and domestic use.

Description

Thickness 2.4 - 2.5 mm

Cow hides

Vegetable tannage

Finishing Pigmented

Tests

Dry rub fastness
UNI EN ISO 11640
1000 cycles 5 Grey Scale

Wet rub fastness
UNI EN ISO 11640
250 cycles 5 Grey Scale

Light fastness
UNI EN ISO 105-B01
72h 4-5 Grey Scale

Adhesion of finishing
UNI EN ISO 11644 >15 N/10mm


Flex resistance
UNI EN ISO 5402
20000 cycles no damages

Taber abrasion
500 cycles CS10
load 500 gr. 4-5 grey scale

Care

Dust with a soft and dry cloth for the normal cleaning. Stains can be treated with a wet cloth or cotton wool and with products for the cleaning initially more delicate like neutral soap or cleansing milk. Dry immediately after treatment. Never use abrasive or aggressive products like solvents, stain removers. Never steam it. Don't use shoe cleaning products. When a new product is used for cleaning, apply it in a "hidden" area to test its effectiveness and to avoid damages where more visible. Avoid placing leather near direct sun. Keep the leather away from heat sources. Dust regularly with a soft and dry cloth.

Samples are purely indicative because of natural inconsistencies that occur in the raw materials. As a result there may be small differences in the product delivered.

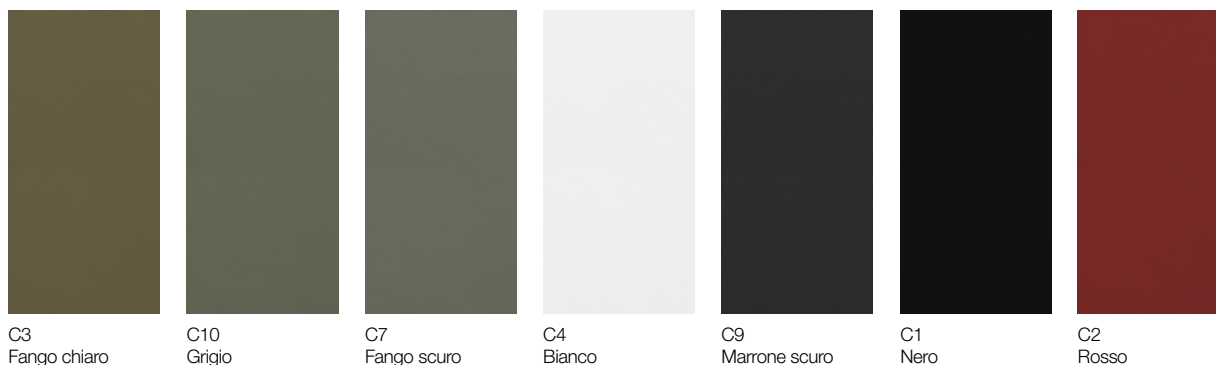

C3
Fango chiaro

C10
Grigio

C7
Fango scuro

C4
Bianco

C9
Marrone scuro

C1
Nero

C2
Rosso

lapalma

via majorana 26
35010 cadoneghe (PD), italy
t.: +39 049 702788
info@lapalma.it
www.lapalma.it